


## GF Series


Two Wire Digital Apartment Intercom  
5 entries and 250 apartments

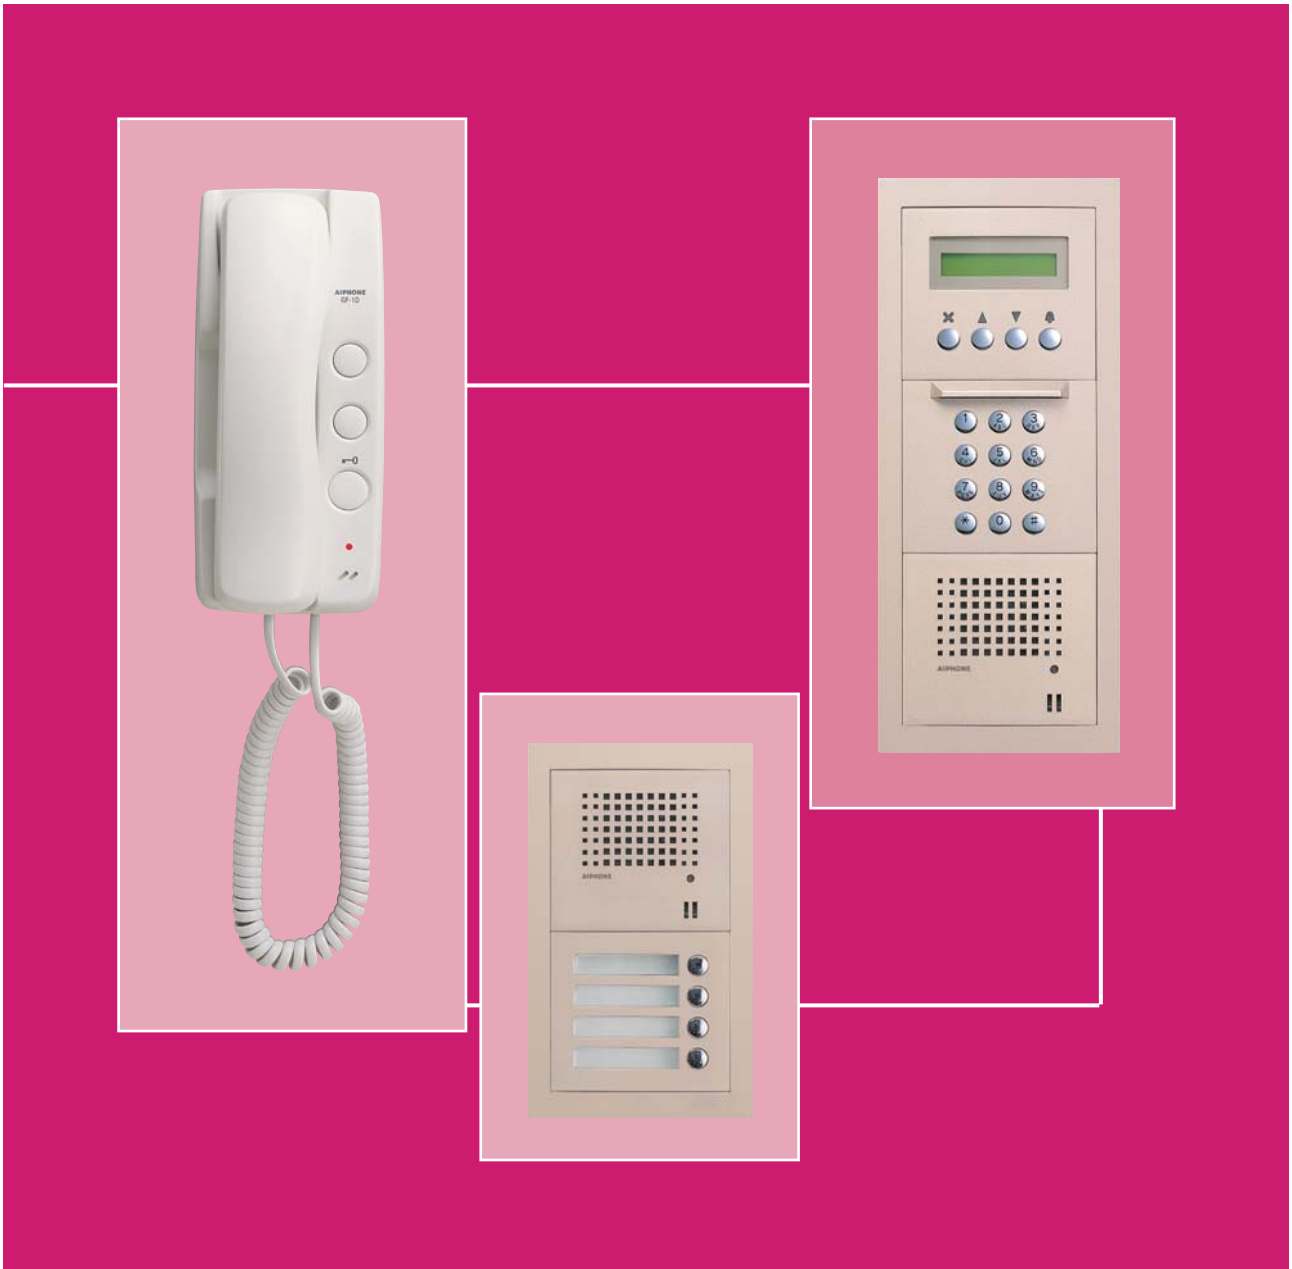

### Apartment Security Intercom

# Two Wire Digital Apartment Intercom

## System Configuration

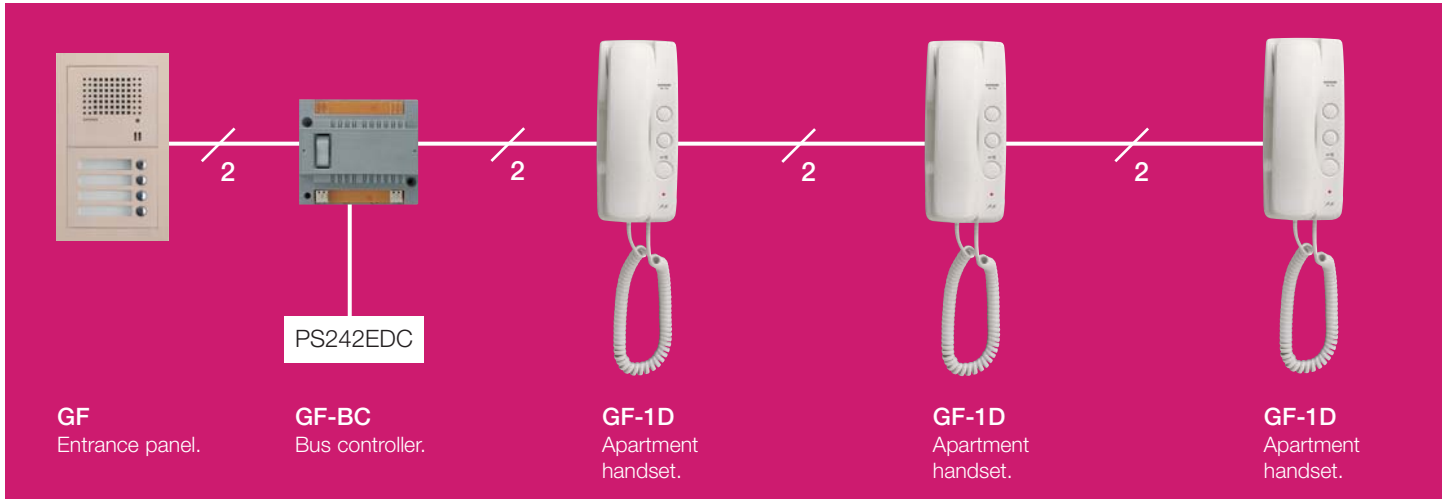

## Features

- Up to 250 handsets.\*
  - Up to 5 entrances.
  - Vandal resistant entrance stations.
  - Simple 2 wire installation.
  - Modular Entrance stations.
  - Two additional buttons on apartment handset for control of additional door release or lift control (requires additional hardware).
  - Full privacy.
  - Doorbell option on apartment handset.
  - Up to 2 stations per apartment.
- \* Digital name scroll module and keypad must be used on systems with over 100 handsets.

## Cables

- 0.5 mm ~ 1.2 mm.
- PE (polyethylene) insulated and vinyl-sheathed cable.
- Solid copper conductor.

## Specifications

<b>Power Source</b>	24 V DC, 0.9A, PS242EDC.	
<b>Call-in</b>	Electronic tone with adjustable volume.	
<b>Door release</b>	Contact rating: 4 amp, 24 volt.	
<b>Wiring</b>	2 parallel wires, non-polarised for communication bus. Each bus can support up to 50 GFID handsets and 3 GFDAB entrance stations.	
<b>Distance</b>		
Diameter	0.5 mm	0.9 mm
GFBC to entrance	150 m	300 m
GFBC to last GFID	150 m	300 m

## Additional Options

<b>GF-DAB</b> Audio module.	<b>GF-2P</b> 2 call panel.	<b>GF-1D</b> Apartment handset.	<b>GF-3B</b> Back box.
<b>GF-DP</b> Panel.	<b>GF-3P</b> 3 call panel.	<b>GF-2F</b> 2 module frame.	<b>GF-BP</b> Blank panel.
<b>GF-NSA</b> Name scroll module.	<b>GF-4P</b> 4 call panel.	<b>GF-3F</b> 3 module frame.	<b>EL9S</b> Door release.
<b>GF-NSP</b> Panel.	<b>GF-SW</b> Call switch module.	<b>GF-2B</b> Back box.	<b>MAWB</b> Light relay.
<b>GF-1P</b> 1 call panel.	<b>GF-BC</b> Bus controller.	<b>PS242EDC</b> 24V power supply.	
<b>GF-1DFS</b> Apartment handset fitted with service switch.	<b>GF-1DCR</b> Apartment handset fitted with call relay output.		

Your local Aiphone reseller:

