

NIDAC

Presco KEYPAD

PRE

Standard Presco™ Keypad

N761



Features

- Compatible with all Presco™ decoder models.
- Sealed "Tactile" buttons.
- Choice of Ivory or Charcoal colour.
- Audible (buzzer) and visual (LED) feedback of key presses.
- Split system for maximum security, (Keypad & Decoder).
- 17mm thin surface mounting.
- Hidden screw mounting.
- 36 month manufacturer's warranty.
- Designed and manufactured in Australia.


+ Mounting Screw

+ Wire Entry

PRE Mounting Template

+ Mounting Screw

PRE Keypad Connections

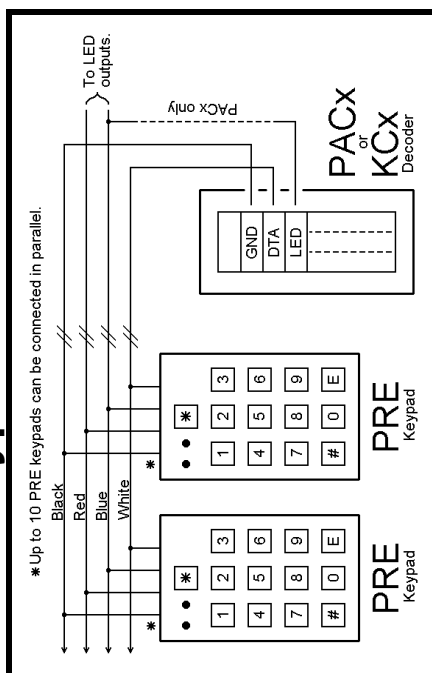

SPECIFICATIONS

Voltage: 7 to 15 Volts D.C. current limited to 23mA (supplied by Presco™ decoder).

Current: 0.25mA in standby.

Dimensions: 120mm x 76mm x 17mm.

Weight: 84gms.

Operating Temperature: 0°C to 70°C.

Keypad & decoder separation: 1Km (100Ω max. return resistance, unshielded).

CONNECTIONS

Black – Ground (GND), White – Data (DTA),
Blue – Green LED drive (+12 to 24 Volts D.C.),
Red – Red LED drive (+12 to 24 Volts D.C.).

WARRANTY

The manufacturer will replace or repair this product if proven to be faulty (excluding accidental or malicious damage) under the 36 month warranty offered from the date of purchase.

As NIDAC Security Pty. Ltd. or its agents do not perform the final installation, inspection or training in the use of this product, they cannot be held liable for injury, loss or damage directly or consequentially arising from the use or misuse of this product.

The software design of the NIDAC Presco™ is protected internationally. Design improvement and specification changes are subject to change without notice. All designs are copyright protected.