


# 17" Pure Flat CRT Monitor

## Ness 17DXA 17" Colour CRT Monitor


- Multi-Language OSD (On Screen Display) user control
- 19" rack mountable
- Over/Under scan (Push-push type on front panel)
- Super high resolution >800TV lines
- Built-in 3 Channel manual switcher
- Auto loop through
- Microprocessor digital control
- Durable metal cabinet
- Dual scanning system NTSC/PAL compatible
- Universal power input AC 100 ~ 240V
- Built-in clear and crisp speaker
- (17") Viewing area > (15") 13%



### FRONT PANEL CONTROLS

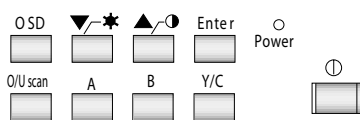


### REAR PANEL

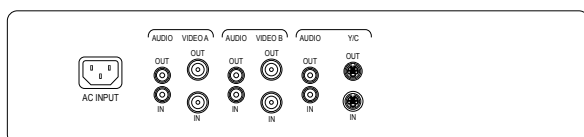

### DIMENSIONS

unit: mm

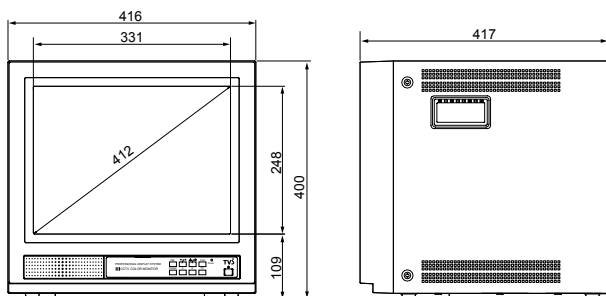

### SPECIFICATIONS

<b>Part Number</b>	104-317
<b>Model</b>	Ness - 17DXA
<b>Picture Tube</b>	17" 0.25mm color CDT
<b>Horizontal Resolution</b>	>800 TV lines (Center)
<b>Scanning Frequency</b>	15.734 KHz/60 Hz (NTSC) 15.625 KHz/50 Hz (PAL)
<b>Video Input</b>	Composite video 1.0 V p-p 75 Ω
<b>Video Connections</b>	Video BNC in x 2, Y/C in x 1 Video BNC out x 2, Y/C out x 1
<b>Audio Connections</b>	RCA in x 3 RCA out x 3
<b>Control Front</b>	Power on/off, O/U scan, OSD for...
<b>Aspect Ratio</b>	4:3
<b>Color Temperature</b>	9300°K (NTSC) / 6500°K (PAL)
<b>Power Input</b>	AC 100 ~ 240V, 50/60 Hz
<b>Power Consumption</b>	100W max
<b>Dimensions (WxHxD) Packing</b>	575 x 523 x 548 mm
<b>Product</b>	416 x 400 x 417 mm
<b>Weight Net</b>	20 Kgs
<b>Gross</b>	21 Kgs
<b>Operating Humidity Condition</b>	10% ~ 90%
<b>Operating Temperature Range</b>	-10°C ~ +50°C



**SYDNEY** 02 8825 9222  
sales@ness.com.au

**MELBOURNE** 03 9875 6400  
nessmelb@ness.com.au

**BRISBANE** 07 3399 4910  
nessbris@ness.com.au

**PERTH** 08 9328 2511  
nessper@ness.com.au

**ADELAIDE** 08 8152 0000  
adelaide@ness.com.au

**NFS (NZ)** 09 580 1576  
sales@nfs.co.nz



**CCTV Products**

www.ness.com.au

