




104-287 17" TFT MONITOR 104-288 19" TFT MONITOR

- HIGH RESOLUTION CCTV MONITOR : 1280 X 1024
- MULTI VIDEO STANDARD (NTSC / PAL / AUTO)
- MULTI-INPUT AV1 / AV2 / S-VIDEO / VGA
- MULTI LANGUAGE SUPPORT
- FAST RESPONSE TIME : 8MS
- BRIGHTNESS 270 CD/M AND MORE
- HIGH CONTRAST AT 500:1 AND MORE
- KEY LOCK FUNCTION
- SCAN MODE (OVER/UNDER/4:3/WIDE/FULL)
- OPTIONAL RACK MOUNT TYPE BRACKET AVAILABLE
- 3D COMB FILTER / 3D DE-INTERLACE
- PIP (PICTURE IN PICTURE) FUNCTION
- GLASS FRONT / METAL BODY

Model	104-287	104-288
Front Controls	Auto, Menu, Up/Down, Source, Power	
Display Resolution (dot)	640 x 480 @ 60/72/75 800 x 600 @ 56/60/72/75 1024 x 768 @ 60/70/75 1280 x 1024 @ 60/75	
Active Area (mm)	337.92(H) x 270.336(V)	376.32(H) x 301.056(V)
Dot Pitch (mm)	0.264 x 0.264mm	0.294 x 0.294mm
LCD Profile Ratio	5:4	
Display Color	16.2M	
Brightness (Central)	300cd/m2	270cd/m2
Contrast Ratio	500 :1Typ	700 :1Typ
Viewing Angle	Left 85° Right 85° Up 85° Down 85°	Left 80° Right 80° Up 75° Down 60°
Response Time	8ms	
Input Voltage	100~240V AC 60Hz/ 50Hz	
Input Signal	1Vp-p composite video	
Input Impedance	75 ohm	
Output Impedance	75 ohm (Auto Termination)	
NTSC / PAL	525 lines, 60 fields/ sec. / 625 lines, 50 fields/ sec.	
VGA Input	15 pin D-SUB connector	
Video Input/ Output	Input BNC x 2 / Looping Output BNC x 2 (Auto Termination)	
Audio Input/ Output(L/R)	RCA Jack x 2 Set / RCA Jack x 2 Set	
Y/C Input	4-pin DIN connector x 1	
Speaker	2W + 2W	
Power Consumption	40W	
Weight (kg)	N.W./ G.W.: 7.0 / 8.3	N.W./ G.W.: 7.85 / 9.1
Dimensions (mm)	407(W)x81(D)x345(H)	440(W)x81(D)x374(H)
Operating Temperature	-10° to 50°C	
Storage Temperature	-20° to 60°C	
Certification	CUL, UL, FCC, CE	

PROFESSIONAL SERIES MONITORS Rugged Industrial Construction + Technical Excellence

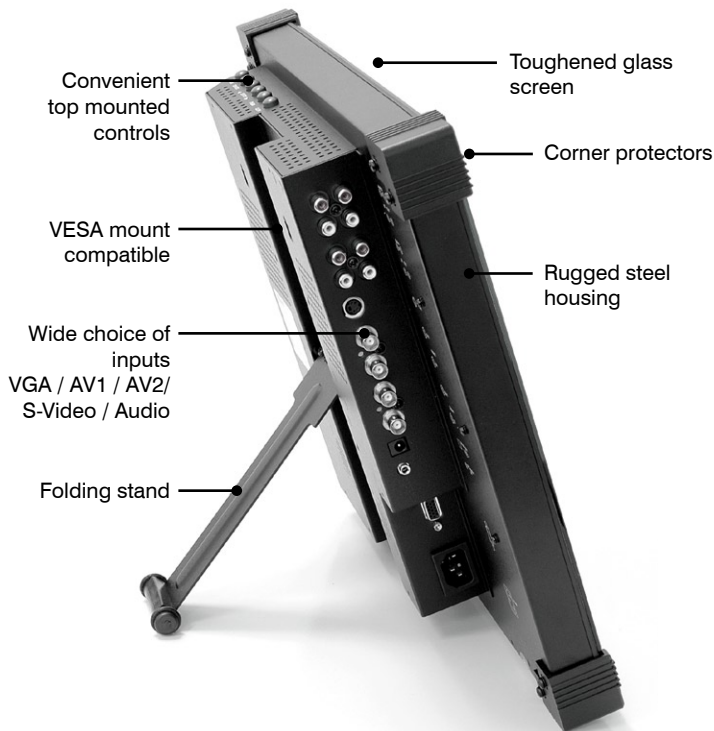

SYDNEY 02 8825 9222
sales@ness.com.au

MELBOURNE 03 9875 6400
nessmelb@ness.com.au

BRISBANE 07 3399 4910
nessbris@ness.com.au

PERTH 08 9328 2511
nessper@ness.com.au

ADELAIDE 08 8152 0000
adelaide@ness.com.au