

Installation Manual

TPC3




DC - DC / AC-DC Converter - 5Vdc Output



Tactical Technologies Pty Ltd



CAUTION



Equipment must be installed & serviced by suitably qualified service personnel in a restricted access area. There are no user serviceable parts inside.

Do not remove module covers

No user serviceable parts inside

General



This power convertor is designed for indoor use only.

The TPC3 is a low profile DC - DC / AC - DC Convertor of switchmode design.

This model features output current limiting and thermal shutdown protection with auto recovery.

Connection

Connect input power to terminals marked "Input" (see diagram overleaf). Note that these terminals are not polarity conscious.

Load equipment may be connected to terminals marked "Out". Confirm polarity before connecting.


Input and output LED's should be illuminated when operating normally.

There are no fuses or user serviceable components inside the cabinet - return to your supplier or Tactical Technologies for service or repair.



LAYOUT

TPC3

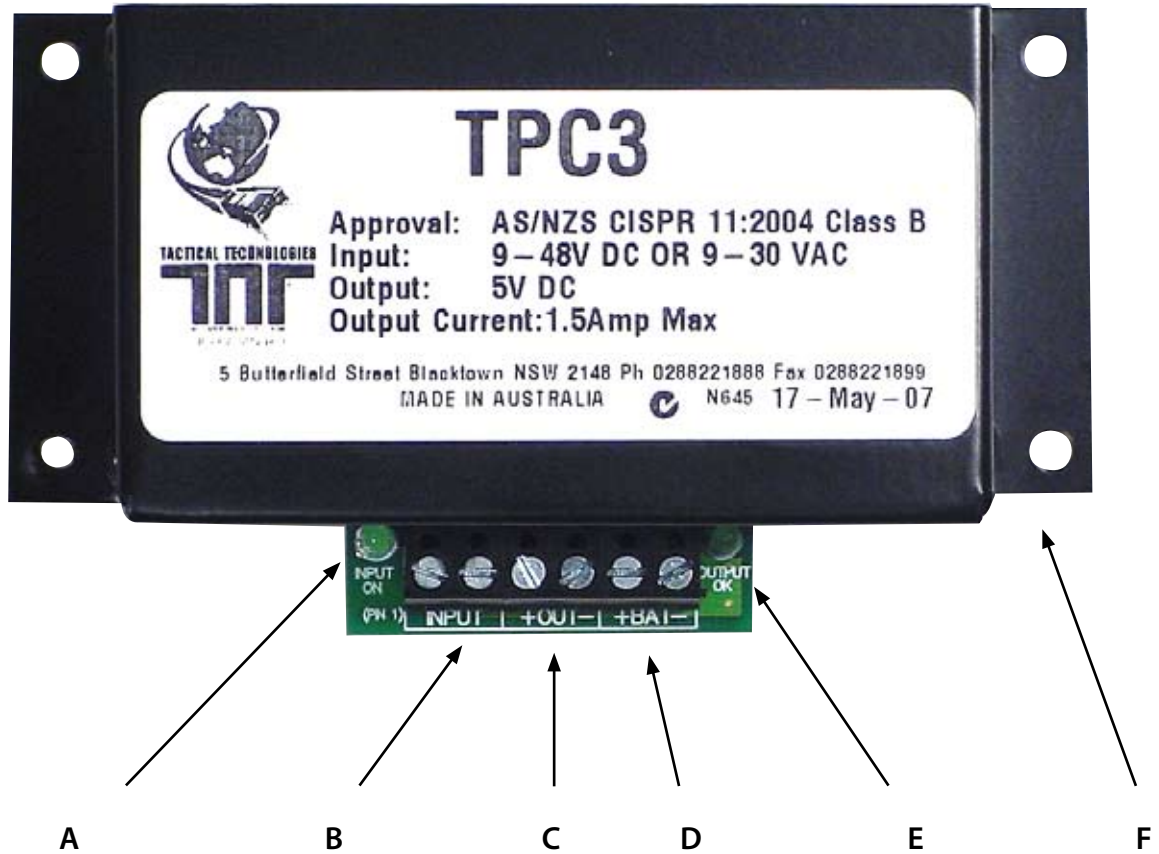

A	Input OK LED
B	Input Terminals: 9 - 48 Vdc / 9 - 30 Vac
C	Output Terminals - 5Vdc 1.5A Maximum
D	These terminals NOT used on this model
E	Output OK LED
F	Mounting Holes

Warranty Statement

Tactical Technologies Pty Limited guarantees this product against defective parts and workmanship for a period of twelve (12) months from the date of purchase. If any defect appears during the warranty period, please return the goods to Tactical Technologies Pty Limited freight paid. The goods will be repaired or replaced, then returned.

Tactical Technologies Pty Limited assumes no liability for consequential or indirect damage and accepts no responsibility for repairing damage to products caused by misuse, careless handling or where repairs have been made by others. In the interest of ongoing product development, Tactical Technologies Pty Limited reserves the right to modify, vary or alter the design of this product without written notice.

Specifications

	TPC 3
Input Voltage	9 - 48 Vdc / 9 - 30 Vac
Output Voltage	5 Vdc
Output Current	1.5A Max.
Output Protection	Current Limiting with Auto Recovery, Thermal Shutdown
Operating Temperature	0° C to 45° C
Soft Start	1 - 2 seconds (typical)
EMC Standards	C-Tick N645 / CISPR11:2004 - Class B
Dimensions	115 W x 65 D x 40 H mm

Tactical Technologies Pty Ltd

ABN 13 066 744 661

Tel: +61 2 8822-1888 www.tac-tech.com.au 5 Butterfield St, Blacktown NSW 2148 Fax: +61 2 8822-1899

“ Changing The Way You Think About Power ! ”